

07-17-00

H

PTO/SB/05 (2/98)

Approved for use through 09/30/2000 OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 CFR § 1.53(b))</small>	<b>Attorney Docket No.</b> 3000-045	
	<b>First Inventor or Application Identifier</b> Earl T. Crouch	
	<b>Title</b>	WEFT INSERTED, WARP KNIT PRINTING SUBSTRATE
	<b>Express Mail Label No.</b> EL 576728336US	

PTO  
09/16/00  
jcet3 U.S. PTO




<b>APPLICATION ELEMENTS</b> <small>See MPEP chapter 600 concerning utility patent application contents.</small>	<b>ADDRESS TO:</b> Commissioner for Patents Box Patent Application Washington, DC 20231	
1. <input checked="" type="checkbox"/> *Fee Transmittal Form (e.g., PTO/SB/17) <small>(Submit an original and a duplicate for fee processing)</small>	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)	
2. <input checked="" type="checkbox"/> Specification [Total Pages 15] <small>(preferred arrangement set forth below)</small> — Descriptive title to the Invention — Cross References to Related Applications — Statement Regarding Fed sponsored R & D — Reference to Microfiche Appendix — Background of the Invention — Brief Summary of the Invention — Brief Description of the Drawings (if filed) — Detailed Description — Claim(s) — Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies	
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 16]	<b>ACCOMPANYING APPLICATION PARTS</b>	
4. Oath or Declaration [Total Pages 1] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <small>(for continuation/divisional with Box 17 completed)</small> <b>[Note Box 5 below]</b> i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b> Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))	
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	9. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small>	
	10. <input type="checkbox"/> English Translation Document (if applicable)	
	11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations	
	12. <input type="checkbox"/> Preliminary Amendment	
	13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small>	
	14. <input type="checkbox"/> *Small Entity <input type="checkbox"/> Statement filed in prior application, Status still proper and desired	
	15. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small>	
	16. <input type="checkbox"/> Other: _____	


**\*NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary statement:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ / \_\_\_\_\_  
Prior application information: Examiner: Group/Art Unit:

**18. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label  or ☒ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

NAME	RHODES & MASON, P.L.L.C.				
ADDRESS	1600 First Union Tower 300 North Greene Street				
CITY	Greensboro	STATE	NC	ZIP CODE	27401
COUNTRY	USA	TELEPHONE	336-273-4422	FAX	336-271-2830

Name (Print/Type)	Edward W. Rilee	Registration No. (Attorney/Agent)	31,869
Signature		Date	July 14, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Commissioner for Patents  
Box Fee Application  
Washington, DC 20231

Sir:

CERTIFICATE OF MAILING/EXPRESS MAIL

"Express Mail" Mailing Label Number EL 576728336US

Date of Deposit July 14, 2000

I hereby certify that this paper, which is a utility patent application entitled **WEFT INSERTED, WARP KNIT PRINTING SUBSTRATE** (our file 3000-045), and the attached fee are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner for Patents, Box Fee Application, Washington, DC 20231.

Mailed By: \_\_\_\_\_

  
Donna Cottelli

# WEFT INSERTED, WARP KNIT PRINTING SUBSTRATE

## Background of the Invention

### 5 (1) Field of the Invention

The present invention relates generally to a printing substrate for signage and the like formed from a continuous fabric web and, more particularly, to a printing substrate formed and finished in a single operation which is substantially distortion free.

### 10 (2) Description of the Prior Art

Recent years have seen a proliferation of outdoor advertising media for such events as outdoor sporting events, concerts, celebrations, etc. As the volume of advertising has grown, so has the demand for more visible media which can be cost effectively produced quickly and with a high level of quality. Traditionally, printing  
15 substrates for such signage has been formed from woven fabrics because paper and non-woven fabrics are not strong enough for these applications. Woven fabrics can be produced as relatively large panels for use as banners and can be coated with print receptive materials that are resistant to running and fading of the printed materials. However, because of inherent problems with instability in the larger denier, high  
20 strength yarns needed and with fabric distortion created during the handling and subsequent coating of these fabrics, image quality often suffers in the form of streaking and uneven color absorption.

Knitted fabrics have heretofore not been suitable for use in outdoor signage because even higher degrees of distortion are usually introduced into a knitted fabric  
25 than a woven fabric as a result of movement and handling required to coat the knitted fabric in preparation for its intended use. However, knitted fabrics, if they could meet the required surface stability, would offer huge economic advantages over woven printing substrates. For example, warp knitting machines can produce large width continuous fabric webs at extremely high speed when compared to the speed of a  
30 loom. Fabric webs produced by warp knitting machines have many industrial

09616616 " 071400

applications but generally are subsequently coated with another material, such as plastic, to produce a composite material. In such cases, the fabric web acts as a substrate to give added strength and the plastic coating may be, for example, a roofing material. Because the fabric web is only used for reinforcement, distortion in the fabric web is not critical, nor is it usually seen by the end user.

While warp knitting machines having widths greater than 72 inches are common and relatively inexpensive, finishing machines having widths greater than 72 inches become exponentially expensive. In addition, the costs associated with moving such wide rolls of fabric can add substantial cost per yard to the final material. Prior art attempts to integrate the fabric forming and finishing operations into a single operation have not been very successful. Specifically, it is very difficult to control the thickness of the coating operation unless the coating operation is continuous. However, by its nature, fabric forming must be stopped and started when defects, such as broken yarns, occur.

Thus, there remains a need for a printing substrate for signage or the like formed economically from a weft inserted, warp knitted continuous fabric web while, at the same time, the fabric web can be finished in a single operation so as to be substantially distortion free for improved print quality.

### **Summary of the Invention**

The present invention is directed to a printing substrate. The printing substrate is formed from a weft inserted, warp knit fabric web finished in a single operation having at least an 8X9 construction and a print receptive coating. In the preferred embodiment, the print receptive coating is polyvinyl chloride, such as a vinyl and acrylate blend. In the most preferred embodiment, the print receptive coating is a plastisol coating. The print receptive coating may further include an opacifier, such as titanium dioxide and a flame retardant.

Also, in the preferred embodiment, the fabric web is formed and finished in a single operation. Because of this unique manufacturing method, the fabric web is substantially distortion free. Specifically, the variation in the warp direction of the

finished fabric web is less than about 6%, and preferably less than about 3%. In addition, the variation in the weft direction of the finished fabric web is less than about 16%, and preferably less than about 5%.

5 Preferably, the finished fabric web is formed from synthetic yarn, such as polyester yarn. The finished fabric web may be manufactured in widths greater than about 72, 96 or 120 inches wide. In the preferred embodiment, the fabric web is formed with between about an 8X9 and an 18X18 construction and preferably about a 9X18 construction with at least 500d ends.

10 One apparatus and method for producing the present invention is disclosed in co-pending application serial number 09/479,678, filed January 7, 2000, now U.S. Patent No. \_\_\_\_\_, which is hereby incorporated by reference in its entirety. This application discloses an apparatus for forming and finishing a continuous fabric web in a single operation. The apparatus includes a fabric web forming station for forming a continuous fabric web and a finishing station downstream from the fabric  
15 web forming station for receiving the continuous fabric web from the fabric web forming station and for providing a finishing treatment to the continuous fabric web. In the preferred embodiment, the fabric web forming station is a warp knitting machine having a creel and a plurality of yarn packages for supplying yarn to the warp knitting machine.

20 In the preferred embodiment, the finishing station includes a substantially excess-free applicator which helps to prevent thick spots in the coated fabric web which may occur when a coating applicator is stopped and restarted. The applicator of the present invention includes a liquid coating supply; an elongated pan extending across the width of the fabric web for containing the liquid coating; and an elongated  
25 knurled roller positioned in the pan in direct contact with the liquid coating and in direct contact with the bottom surface of the fabric web, whereby the rotation of the knurled roller transfers a predetermined amount of the liquid coating to the fabric web.

30 The volume of the grooves in the knurled surface of the knurled roller is proportional to the predetermined amount of the liquid coating being transferred to the

fabric web. The predetermined amount of the liquid coating being transferred to the fabric web is substantially equal to the desired liquid take-up of the fabric web, thereby eliminating the need for removing excess liquid take-up from the fabric web.

To further control the accuracy of the amount of liquid being transferred from the knurled roller to the continuous fabric web, the deflection of the knurled roller is minimized in several ways. First, the bulk density of the knurled roller is less than about 3 times greater than the density of the liquid coating, thereby providing buoyancy to support the weight of the knurled roller. In the preferred embodiment the knurled roller is formed substantially from aluminum; however, the knurled roller could be jacketed with a high-density outer sheath and a low-density inner core. Second, a level control maintains the amount of liquid in the elongated pan at a predetermined level. Third, a deflection compensator attached to the knurled roller.

The deflection compensator is attached to the knurled roller includes a frame located at at least one end of the knurled roller, a journal extending outwardly from the knurled roller, a first bearing attached to the frame for receiving the journal, a second bearing located at the outermost end of the journal and a pneumatic cylinder linkage attached between the second bearing and the frame for providing a downward force to compensate for the deflection of the knurled roller.

In the preferred embodiment, the finishing station includes a curing station downstream from the applicator. The curing station may include both a drying station and a heat set station downstream from the drying station. In the preferred embodiment the drying station includes a heat drum having a temperature between about 180 F and 225 F to remove most of the moisture from the coated continuous fabric web but not to produce VOCs which occur during curing of the coating. Desirably, a temperature of about 212 F will optimize the amount of moisture removed from the coated continuous fabric, while minimizing shrinkage of the fabric. A hood is located above the drying station for removing moisture driven off from the fabric web by the drying station. The airflow velocity of the hood is greater than about 400 CFM/ft of the width of the continuous fabric web which aids in drying the coated continuous fabric web. However, since the vapors include little or no VOCs,

09646616 "071400

this large amount of air does not need to be treated further before being discharged into the atmosphere.

In the preferred embodiment, the heat set station includes a low thermal mass heat source which quickly cools when turned off. This permits the finishing station to  
5 be stopped and started as needed without burning the coated continuous fabric web. The heat set station also includes a hood located above the heat set station for removing VOCs driven off from the fabric web by the heat set station. Unlike the drying station, the airflow velocity of the hood is less than about 100 CFM/ft of the width of the continuous fabric web. This is a much smaller amount of air to be treated  
10 before being discharged into the atmosphere and results in substantial cost savings. In the preferred embodiment, the heat set station further includes a tenter frame for heat setting the continuous fabric web to a predetermined width.

Also in the preferred embodiment of the present invention is an accumulator located between the fabric web forming station and the finishing station for providing  
15 a fabric web reserve between the fabric web forming station and the finishing station. The accumulator includes a frame extending across the width of the continuous fabric web, a pair of arms each having one end attached to the frame on opposite edges of the continuous fabric web, a biased roller attached between the other ends of the pair of rollers and extending across the width of the continuous fabric web and a control  
20 system for varying the speed of the finishing station in response to the position of the accumulator arms.

Accordingly, one aspect of the present invention is a printing substrate, said printing substrate comprising a weft inserted, warp knit fabric web having at least an 8X9 construction.

25 Another aspect of the present invention is a printing substrate, said printing substrate comprising a weft inserted, warp knit fabric web finished in a single operation having at least an 8X9 construction.

Still another aspect of the present invention is a printing substrate, said printing substrate comprising a weft inserted, warp knit fabric web finished in a single  
30 operation having at least an 8X9 construction; and a print receptive coating.

These and other aspects of the present invention will become apparent to those skilled in the art after a reading of the following description of the preferred embodiment when considered with the drawings.

5

### **Brief Description of the Drawings**

Figure 1 is a perspective view of a fabric making apparatus constructed according to the present invention;

Figure 2 is a front view of the apparatus shown in Figure 1;

Figures 3A and 3B is a side view of the apparatus shown in Figure 1;

10 Figure 4 is an enlarged front perspective view of the finishing station shown in Figure 3;

Figure 5 is an enlarged rear perspective view of the finishing station applicator shown in Figure 3;

15 Figure 6A is an enlarged side view of the finishing station applicator shown in Figure 3;

Figure 6B is an enlarged side view of the opposite end of the finishing station applicator shown in Figure 6A;

Figure 6C is an enlarged front view of the finishing station applicator shown in Figure 6A;

20 Figure 7 is a greatly enlarged view of the knurled roller of the finishing station applicator shown in Figure 6C;

Figure 8 is an enlarged side view of the accumulator shown in Figure 3;

Figure 9 is an enlarged side view of the control system for accumulator shown in Figure 8;

25 Figure 10 is a chart showing the relationship between relative fabric forming costs and fabric width;

Figure 11A is a chart showing the relationship between relative VOCs and fabric drying temperature, and between moisture percentage and fabric drying temperature;



Figure 11B is a chart showing shrinkage and moisture removed, and the relationship between shrinkage and moisture removal, as fabric drying temperature is varied;

Figure 12 is a chart showing the relative costs, in dollars, associated with various drying and heat set airflow velocities;

Figure 13 is a diagram showing how the speed of the finishing station, shown in Figure 4, is varied.

Figure 14 is a graph illustrating the relative costs, in dollars, associated with the preferred ranges of warp knitted constructions in comparison with the print resolution which may be obtained for each construction, illustrating the balance between cost and print resolution achieved by the present invention.

### **Description of the Preferred Embodiments**

In the following description, like reference characters designate like or corresponding parts throughout the several views. Also in the following description, it is to be understood that such terms as "forward," "rearward," "left," "right," "upwardly," "downwardly," and the like are words of convenience and are not to be construed as limiting terms.

The present invention includes a weft-inserted warp knitted fabric having a fabric construction of at least 8 warp yarns to 9 weft yarns (8 x 9) and a print receptive coating. For use as printed substrates having sufficient printing surface areas, fabric constructions between about 8x9 and 18x18 are suitable. Both warp and weft yarns are synthetic, and polyester is desired because of its durability and handling characteristics. As banners and the like for outdoor advertising or the display of other information are by necessity large, larger one-piece fabric panels are desired. Warp knitting machines known in the art are capable of producing single panels in excess of 72 inches in width and up to about 120 inches in width. Thus, the printing substrate of the present invention is produced in panels at least 72 inches in width.

The print receptive coating of this embodiment of the present invention is desirably polyvinyl chloride (PVC), and preferably a vinyl acrylic blended coating since acrylic provides enhanced printability and durability. Plastisol is one such preferred vinyl acrylic blend with 100% of the coating remaining on the material since it contains no carriers or solvents that must be evaporated or otherwise removed. However, plastisol has not proven satisfactory as a coating on woven fabrics since a slower process speed is required for its satisfactory application. To enhance light transmission through the printing substrate, an opacifier such as titanium oxide may be used in the finishing process. Further, to meet the requirements of current fire protection codes, such large printed substrates must be flame retardant. Thus, depending upon the specific application, a flame retardant is also applied during the finishing process.

The present invention provides a weft-inserted warp knitted printing substrate having a print receptive coating that may be manufactured during a single operation without the need for additional moving or handling steps. Such a single fabric forming and coating manufacture is disclosed in previously cited co-pending application Serial No. 09/479,678. As described in that application, an apparatus for forming a fabric web in a single operation includes a fabric web forming station for forming a continuous fabric web and a finishing station downstream of the fabric web forming station for providing treatment to the continuous fabric web. Specifically, as best seen in Figures 1 and 2, the fabric making apparatus, generally designated 10, is shown constructed according to the related and present invention. The fabric making apparatus 10 includes three major sub-assemblies: a fabric web station 12; a finishing station 13; and an accumulator 16.

As best seen in Figure 3, in the preferred embodiment, the fabric web forming station 12 is a warp knitting machine having a creel 20 and a plurality of yarn packages 22 for supplying yarn to the warp knitting machine. One such machine is available from LIBA Maschinenfabrik, Naila of West Germany. This machine is described in part by U.S. Patents Nos. 4,154,068; 3,724,241; and 3,584,479 which are hereby incorporated by reference in their entirety. As discussed above, while warp

knitting machines having widths greater than 72 inches are common and relatively inexpensive, finishing machines having widths greater than 72 inches become exponentially expensive. In addition, the overhead costs associated with moving such large rolls can add substantial cost per yard to the final material. This relationship can be best seen in Figure 10 in which the fabric finishing costs increase at a much higher rate than the fabric forming costs. In the present invention, forming and finishing costs only increase at a slightly higher rate than forming alone. This may result in cost savings up to 25 cents per square yard.

As seen in Figures 3A, 4 and 5, the finishing station 13 includes an applicator 14 and a curing station 15. As best seen in Figure 13, fabric web 11 exiting the front face of the fabric forming station 12 passes under rollers 17 and 74 and over rollers 18 and 19 before feeding into finishing station 13 where a liquid coating 26 is applied to the fabric web 11 by the substantially excess-free applicator. In the preferred embodiment, the substantially excess-free applicator system includes a knurled roller assembly 32. As best seen in Figures 6B, 6C and 7, the knurled roller assembly includes a knurled roller 34 for picking up a liquid coating 26 contained in pan 24 by grooves 35 on the surface of the knurled roller 34 and evenly applied to continuous fabric web 11 passing across the top of the knurled roller 34.

The bulk density of the knurled roller 34 is less than about 3 times greater than the density of the liquid coating 26, thereby providing buoyancy to support the weight of the knurled roller 34. In the preferred embodiment the knurled roller 34 is formed substantially from aluminum; however, the knurled roller 34 could be jacketed with a high-density outer sheath and a low-density inner core. As seen in Figure 5, a level control system 30 maintains an optimum level of liquid coating 26 in pan 24 such that knurled roller 34 is floatably supported.

As best seen in Figures 6A and 6B, a deflection compensator 36 also is provided to further prevent sagging of knurled roller 34. In the preferred embodiment, the deflection compensator 36 is comprised of a frame 40 which supports a pivotal first bearing 42, a journal 44, and a second bearing 46. A variable linkage 50 is attached to the second bearing 46 to vary the amount of force applied to

knurled roller 34. In the preferred embodiment, an actuator 52 replaces or is attached to variable linkage 50.

Referring back to Figure 4, in the preferred embodiment, curing station 15 is comprised of both a drying station 54 and a heat set station 60. The coated

5 continuous fabric web 11 feeds into drying station 54 across heat drum 55 where moisture is substantially removed from the coated fabric. Ambient air is drawn through hood 56 mounted directly above heat drum 55 to aid in the drying process. The heat drum is maintained at a temperature between about 180 F and about 225 F to  
10 produce VOCs which occur during curing of the coating. This relationship can be best seen in Figure 11A in which the moisture content decreases at a much higher rate than the VOCs emission rate. Figure 11B shows how a heat drum temperature of approximately 212 F optimizes moisture removal while minimizing shrinkage of the coated fabric.

15 The air flow velocity of the hood 56 is greater than about 400 CFM/ft of the width of the continuous fabric web 11 which aids in drying the coated continuous fabric web 11. However, since the vapors include little or no VOCs, this large amount of air does not need to be treated further before being discharged into the atmosphere.

20 Downstream of heat drum 55, dried fabric web 11 is fed into heat set station 60 where the fabric web 11 passes under heaters 64 for final finishing. In the preferred embodiment, heaters 64 are low-mass infrared lights which quickly cool when turned off. This permits the finishing station 13 to be stopped and started as needed without burning the coated continuous fabric web 11. The heat set station 60  
25 also includes a hood 66 located above the heat set station 60 for removing VOCs driven off from the fabric web 11 by the heat set station 60. Unlike the drying station 54, the airflow velocity of the hood is less than about 100 CFM/ft of the width of the continuous fabric web. This is a much smaller amount of air to be treated before being discharged into the atmosphere and results in substantial cost savings. This  
30 relationship can be best seen in Figure 12 in which the relative process costs on a 1 to

5 scale are shown as a function of drying and heat set CFM rates per foot of fabric web. In the present invention, being able to use low CFM rates for heat setting keeps the total curing station cost low.

In the preferred embodiment, the heat set station 60 further includes a tenter  
5 frame 62 for heat setting the continuous fabric web 11 to a predetermined width. One such machine is available from Marshall & Williams Company of Greenville, SC. This machine is described in part by U.S. Patent No. 3,179,975 which is hereby incorporated by reference in its entirety. The fabric is then taken up on a conventional take-up unit such as that manufactured by Greenville Machinery Corporation of  
10 Greenville, South Carolina.

In the preferred embodiment, the present invention also provides a fabric web reserve between the fabric making station 12 and the finishing station 13. As seen in Figures 8 and 9, accumulator 16 includes a biased roller 74 which is supported by two arms 70, 72 on a frame 75. A control system 76 includes a position sensor 80 for  
15 varying the speed of electric motor 86 and the finishing station 13 in response to the position of the accumulator arms 70, 72. As best seen in Figure 13, position sensor 80 senses the relative position of accumulator arms 70, 72 and provides an input to a microprocessor 82. Microprocessor 82 provides an output signal to a DC electric voltage controller 84 which varies the speed of electric motor 86 and the finishing  
20 station 13. Electric motor 86 is coupled to and turns pulling roller 88. The lower the position of accumulator arms 70, 72, the higher the speed of electric motor 86. Conversely, as arms 70, 72 rise, the speed of electric motor 86 is reduced.

In operation, the fabric web 11 is formed by the warp-knitting machine 12 and passes to the finishing station 13. Fabric web 11 exiting the front face of the fabric  
25 forming station 12 passes under rollers 17 and 74 and over rollers 18 and 19 before feeding into finishing station 13 where the liquid coating 26 is applied to the fabric web 11 by the substantially excess-free applicator and knurled roller assembly 32. Level control system 30 maintains an optimum level of liquid coating 26 in pan 24 such that knurled roller 34 is floatably supported and deflection compensator 36 also  
30 further prevent sagging of knurled roller 34.

A fabric web reserve is provided between the fabric making station 12 and the finishing station 13 by accumulator 16. Control system 76 varies the speed of electric motor 86 and finishing station 13 in response to the position of the accumulator arms 70, 72.

5           The coated continuous fabric web 11 then feeds into drying station 54 across heat drum 55 where moisture is substantially removed from the coated fabric. Ambient air is drawn through hood 56 mounted directly above heat drum 55 to aid in the drying process.

10           Downstream of heat drum 55, the dried fabric web 11 is fed into heat set station 60 where the fabric web 11 passes under heaters 64 for final finishing by the tenter frame 62 for heat setting the continuous fabric web 11 to a predetermined width.

15           The present invention is able to use relatively common warp knitting machines having widths greater than 72 inches without the need for very expensive finishing machines having widths greater than 72 inches. In addition, the overhead costs associated with moving such large rolls are substantially reduced as shown in Figure 10 in which the fabric finishing costs increase at a much higher rate than the fabric forming costs. Specifically, in the present invention, forming and finishing costs only increase at a slightly higher rate than forming alone thereby resulting in cost savings up to 25 cents per square yard.

20           In addition, the present invention provides a measurably superior coated fabric web when compared to a standard tenter frame coated fabric web in which the fabric web is separately formed and then finished on the tenter frame and to a conventional high speed finishing, tenter frame system. Samples of all three processes were tested for yarn uniformity in the warp and weft directions shown in Table 1.

**Table 1**

5	<u>PROCESS</u>	<u>WARP DIRECTION</u>			<u>WEFT DIRECTION</u>		
		<u>Spacing</u>	<u>SD</u>	<u>%Var</u>	<u>Spacing</u>	<u>SD</u>	<u>%Var</u>
	Present Invention	2.03mm	0.05	3	1.77mm	0.08	5
	Tenter Frame (I)	2.04mm	0.12	6	1.82mm	0.30	16
	Tenter Frame (II)	too curvy to measure			too curvy to measure		

10

As can be seen, the tenter frame standard deviation is between about 2 ½ and 4 times greater than that of the present invention. The high speed finishing, tenter frame system was so curvy as not to be meaningfully measurable. Handling alone appears to be the cause of the tenter frame variability. However, speed appears to be a major contributor for the high speed finishing, tenter frame system process. Specifically, the present invention operates between about 1 and 4 yards per minute and preferably at about 3 yards per minute. In contrast, the high speed process operates at about 90 yards per minute. Accordingly, the present invention avoids both of these problems and produces a continuous fabric web finished in a single operation which is substantially distortion free. Specifically, the variation in the warp direction of the finished fabric web is less than about 3% (0.05 SD (standard deviation)/2.03) and the variation in the weft direction of the finished fabric web is less than about 5% (0.08 SD/1.77).

15

20

25

Thus, the present invention is able to produce a continuous fabric web finished in a single operation in which the finished fabric web is substantially distortion free. Compared to the prior art, the variation in the warp direction of the finished fabric web is less than about 6% and, preferably, less than about 3%. In addition, the variation in the weft direction of the finished fabric web is less than about 16% and, preferable, less than about 5%.

30

In the preferred embodiment, the finished fabric web is a warp knit fabric and, preferable, is a weft inserted, warp knit fabric. The finished fabric web is formed

from synthetic yarn which, unlike fiberglass-type yarns, are much more difficult to stabilize. Preferably, the finished fabric web is formed from polyester yarn.

The present invention is thus able to produce a finished fabric web greater than about 72 inches wide and, preferably, greater than about 96 inches wide or greater than about 120 inches wide depending on the width of the knitting machine.

A weft-inserted, warp knit printing substrate constructed according to the present invention is formed in a single operation as a 9x18 construction (9 yarns in the warp to 18 yarns in the weft); however, fabric constructions between about 8x9 and 18x18 are satisfactory for such purpose. As described in pending application No. 09/479,678, fabric webs of greater than about 120 inches may be formed and treated on a single apparatus without the need for moving and handling to other stations. Such a single operation provides a fabric construction that is substantially distortion free, and hence, superior for use as a printing substrate. Desirably, yarn uniformity in the warp direction is less than about 3% and less than about 5% in the weft direction.

For printed substrate construction, both warp and weft yarns are polyester with deniers between about 500d and 1000d. As best illustrated in Figure 14, a graph is shown that illustrates the relative costs, in dollars, associated with the preferred ranges of warp knitted constructions in comparison with the print resolution, which may be obtained for each construction. As can be seen, the present invention achieves a balance between cost and print resolution. Figure 14 demonstrates that a fabric construction of at least about 8x9 is required to provide sufficient print area for good print resolution, but that a fabric construction greater than about 18x18 will not be economical. Since fabric cost increases linearly as surface coverage increases geometrically, there is a substantial economical advantage due to increasing surface coverage per unit fabric web cost.

In addition, for large signage intended for outdoor use, the printing substrate must be sufficiently perforate to withstand wind loading and to permit adequate airflow. Fabric constructions greater than about 18x18 may be too tightly formed to provide sufficient permeability for air passage therethrough.



After formation of the weft-inserted, warp knit fabric, a print receptive coating, desirably polyvinyl chloride (PVC), is applied to the knitted fabric. In the preferred embodiment, the knurled roller applicator described in co-pending application Serial No. 09/479,678 is replaced with a smooth roll for applying the print  
5 receptive plastisol for the plastisol viscosity preferably used and for the desired % add-on.

For enhanced durability and printability, a vinyl acrylic blend such as plastisol is applied. While not suitable for higher speed processes, plastisol is a superior coating for lower speed fabric producing and treating machines such as that described  
10 in pending application Serial No. 09/479,678. A distinct advantage of plastisol is that substantially 100% of the coating remains on the fabric since solvents or other carriers are not required. Thus, such a coating can be applied with greater safety during manufacture and without emissions due to evaporation or removal of carriers. For applications involving signage, an opacifier such as titanium dioxide is applied during  
15 the finishing process to enhance light transmissibility, and a flame retardant such as aluminum trihydrate is applied to meet fire code requirements for large printed media.

Certain modifications and improvements will occur to those skilled in the art upon a reading of the foregoing description. It should be understood that all such modifications and improvements have been deleted herein for the sake of conciseness  
20 and readability but are properly within the scope of the following claims.

We Claim:

1. A printing substrate, said printing substrate comprising a weft inserted,  
5 warp knit fabric web having at least an 8X9 construction.

2. The printing substrate according to Claim 1, further including a print  
receptive coating.

10 3. The printing substrate according to Claim 2, wherein said print  
receptive coating is primarily polyvinyl chloride.

4. The printing substrate according to Claim 3, wherein said print  
receptive coating is a vinyl and acrylate blend.

15 5. The printing substrate according to Claim 2, wherein said print  
receptive coating is a plastisol coating.

20 6. The printing substrate according to Claim 2, wherein said print  
receptive coating further includes an opacifier.

7. The printing substrate according to Claim 6, wherein said opacifier is  
about 20 wt.% of said print receptive coating.

25 8. The printing substrate according to Claim 7, wherein said opacifier is  
titanium dioxide.

9. The printing substrate according to Claim 2, wherein said print  
receptive coating further includes a flame retardant.

10. A printing substrate, said printing substrate comprising a weft inserted, warp knit fabric web finished in a single operation having at least an 8X9 construction.

5

11. The printing substrate according to Claim 10, wherein said fabric web is substantially distortion free.

12. The printing substrate according to Claim 11, wherein the variation in the warp direction of the finished fabric web is less than about 6%.

10

13. The printing substrate according to Claim 12, wherein the variation in the warp direction of the finished fabric web is less than about 3%.

15

14. The printing substrate according to Claim 11, wherein the variation in the weft direction of the finished fabric web is less than about 16%.

15. The printing substrate according to Claim 14, wherein the variation in the weft direction of the finished fabric web is less than about 5%.

20

16. The printing substrate according to Claim 10, wherein said finished fabric web is formed from synthetic yarn.

17. The printing substrate according to Claim 16, wherein said finished fabric web is formed from polyester yarn.

25

18. The printing substrate according to Claim 10, wherein said finished fabric web is greater than about 72 inches wide.

19. The printing substrate according to Claim 18, wherein said finished fabric web is greater than about 96 inches wide.

5 20. The printing substrate according to Claim 19, wherein said finished fabric web is greater than about 120 inches wide.

21. The printing substrate according to Claim 10, wherein said fabric web is formed with between about an 8X9 and an 18X18 construction.

10 22. The printing substrate according to Claim 21, wherein said fabric web is formed with about a 9X18 construction.

23. The printing substrate according to Claim 10, wherein said fabric web is formed from at least 500d ends.

15

24. A printing substrate, said printing substrate comprising:

- (a) a weft inserted, warp knit fabric web finished in a single operation having at least an 8X9 construction; and
- (b) a print receptive coating.

20

25. The printing substrate according to Claim 24, wherein said print receptive coating is primarily polyvinyl chloride.

26. The printing substrate according to Claim 25, wherein said print receptive coating is a vinyl and acrylate blend.

25

27. The printing substrate according to Claim 24, wherein said print receptive coating is a plastisol coating.

28. The printing substrate according to Claim 24, wherein said print receptive coating further includes an opacifier.

5 29. The printing substrate according to Claim 28, wherein said opacifier is about 20 wt.% of said print receptive coating.

30. The printing substrate according to Claim 29, wherein said opacifier is titanium dioxide.

10 31. The printing substrate according to Claim 24, wherein said print receptive coating further includes a flame retardant.

32. The printing substrate according to Claim 24, wherein said fabric web is substantially distortion free.

15 33. The printing substrate according to Claim 32, wherein the variation in the warp direction of the finished fabric web is less than about 6%.

20 34. The printing substrate according to Claim 33, wherein the variation in the warp direction of the finished fabric web is less than about 3%.

35. The printing substrate according to Claim 32, wherein the variation in the weft direction of the finished fabric web is less than about 16%.

25 36. The printing substrate according to Claim 35, wherein the variation in the weft direction of the finished fabric web is less than about 5%.

37. The printing substrate according to Claim 24, wherein said finished fabric web is formed from synthetic yarn.

30

38. The printing substrate according to Claim 37, wherein said finished fabric web is formed from polyester yarn.

5 39. The printing substrate according to Claim 24, wherein said finished fabric web is greater than about 72 inches wide.

40. The printing substrate according to Claim 39, wherein said finished fabric web is greater than about 96 inches wide.

10 41. The printing substrate according to Claim 40, wherein said finished fabric web is greater than about 120 inches wide.

42. The printing substrate according to Claim 24, wherein said fabric web formed with between about an 8X9 and an 18X18 construction.

15 43. The printing substrate according to Claim 42, wherein said fabric web formed with about a 9X18 construction.

20 44. The printing substrate according to Claim 24, wherein said fabric web is formed from at least 500d ends.

45. A method for forming and finishing a continuous fabric web in a single operation to produce a printing substrate, said method comprising the steps of:

- 25
- (a) forming a continuous fabric web at a fabric web forming station; and
  - (b) receiving said continuous fabric web directly from said fabric web forming station and providing a print receptive finishing treatment to said continuous fabric web.

46. A method for forming and finishing a continuous fabric web in a single operation to produce a printing substrate, said method comprising the steps of:

- (a) forming a continuous fabric web at a fabric web forming station; and
- 5 (b) receiving said continuous fabric web directly from said fabric web forming station and providing a finishing treatment to said continuous fabric web at a finishing station, said finishing station including: an applicator having (i) a liquid, print receptive coating supply; (ii) an elongated pan extending across  
10 the width of said fabric web for containing said liquid coating; and (iii) an elongated knurled roller positioned in said pan in direct contact with said liquid coating and in direct contact with the bottom surface of said fabric web, whereby the rotation of  
15 said knurled roller transfers a predetermined amount of said liquid coating to said fabric web.

47. A method for forming and finishing a continuous fabric web in a single operation to produce a printing substrate, said method comprising the steps of:

- (a) forming a continuous fabric web at a fabric web forming station;
- 20 (b) receiving said continuous fabric web directly from said fabric web forming station and providing a finishing treatment to said continuous fabric web at a finishing station, said finishing station including: an applicator having (i) a liquid, print receptive coating supply; (ii) an elongated pan extending across  
25 the width of said fabric web for containing said liquid coating; and (iii) an elongated knurled roller positioned in said pan in direct contact with said liquid coating and in direct contact with the bottom surface of said fabric web, whereby the rotation of

- said knurled roller transfers a predetermined amount of said liquid coating to said fabric web; and
- (c) providing a fabric web reserve between said fabric web forming station and said finishing station.

5

09616616 071490  
004720 07097960



### **Abstract of the Disclosure**

A printing substrate. The printing substrate is formed from a weft inserted, warp knit fabric web finished in a single operation having at least an 8X9 construction and a print receptive coating. The print receptive coating is polyvinyl chloride, such as a vinyl and acrylate blend. In the preferred embodiment, the print receptive coating is a plastisol coating. The print receptive coating may further include an opacifier, such as titanium dioxide and a flame retardant. In the preferred embodiment, the fabric web is formed and finished in a single operation. Because of this unique manufacturing method, the fabric web is substantially distortion free. The finished fabric web may be manufactured in widths greater than about 72, 96 or 120 inches wide. In the preferred embodiment, the fabric web is formed with between about an 8X9 and an 18X18 construction and preferably about a 9X18 construction with at least 500d ends.

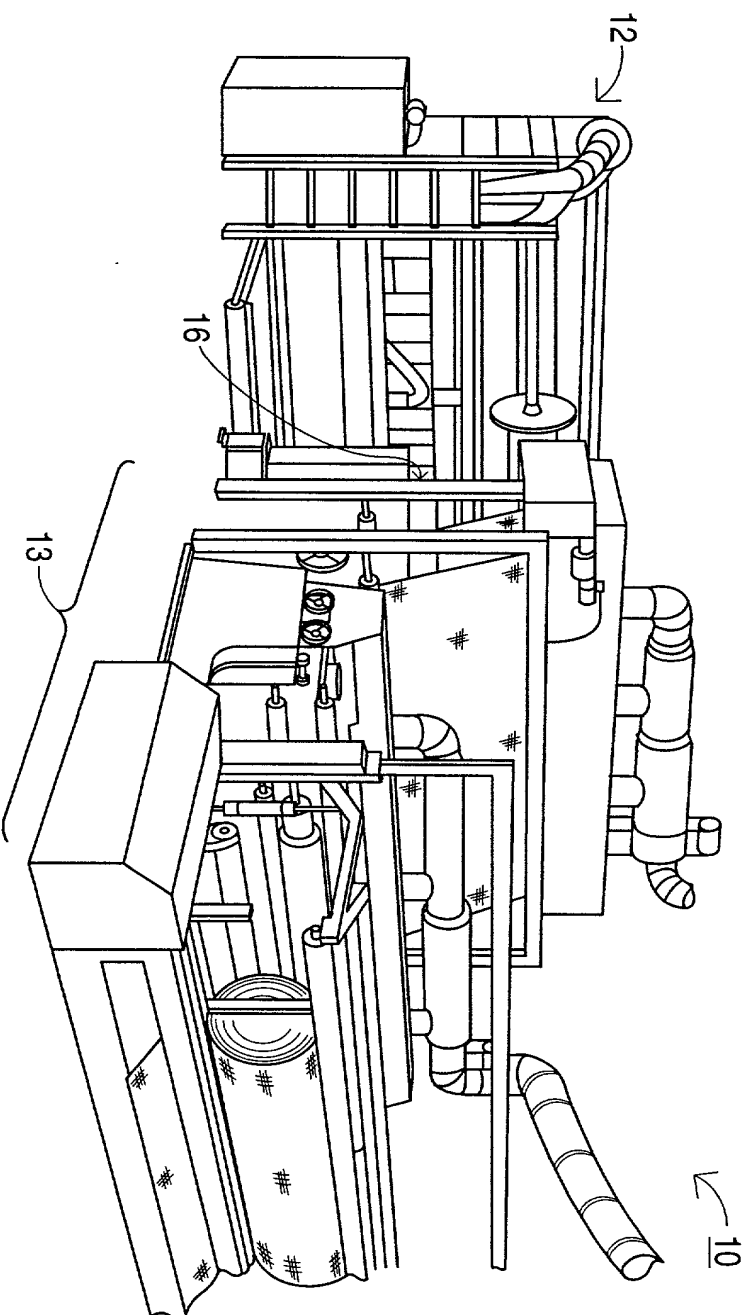


FIG. 1

09616616.071400

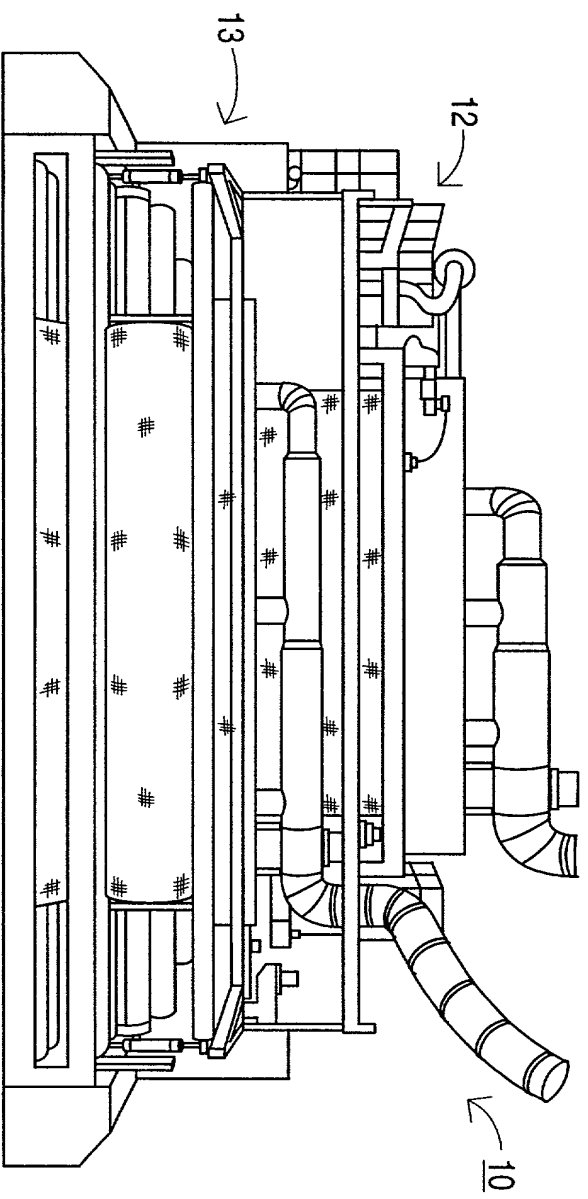
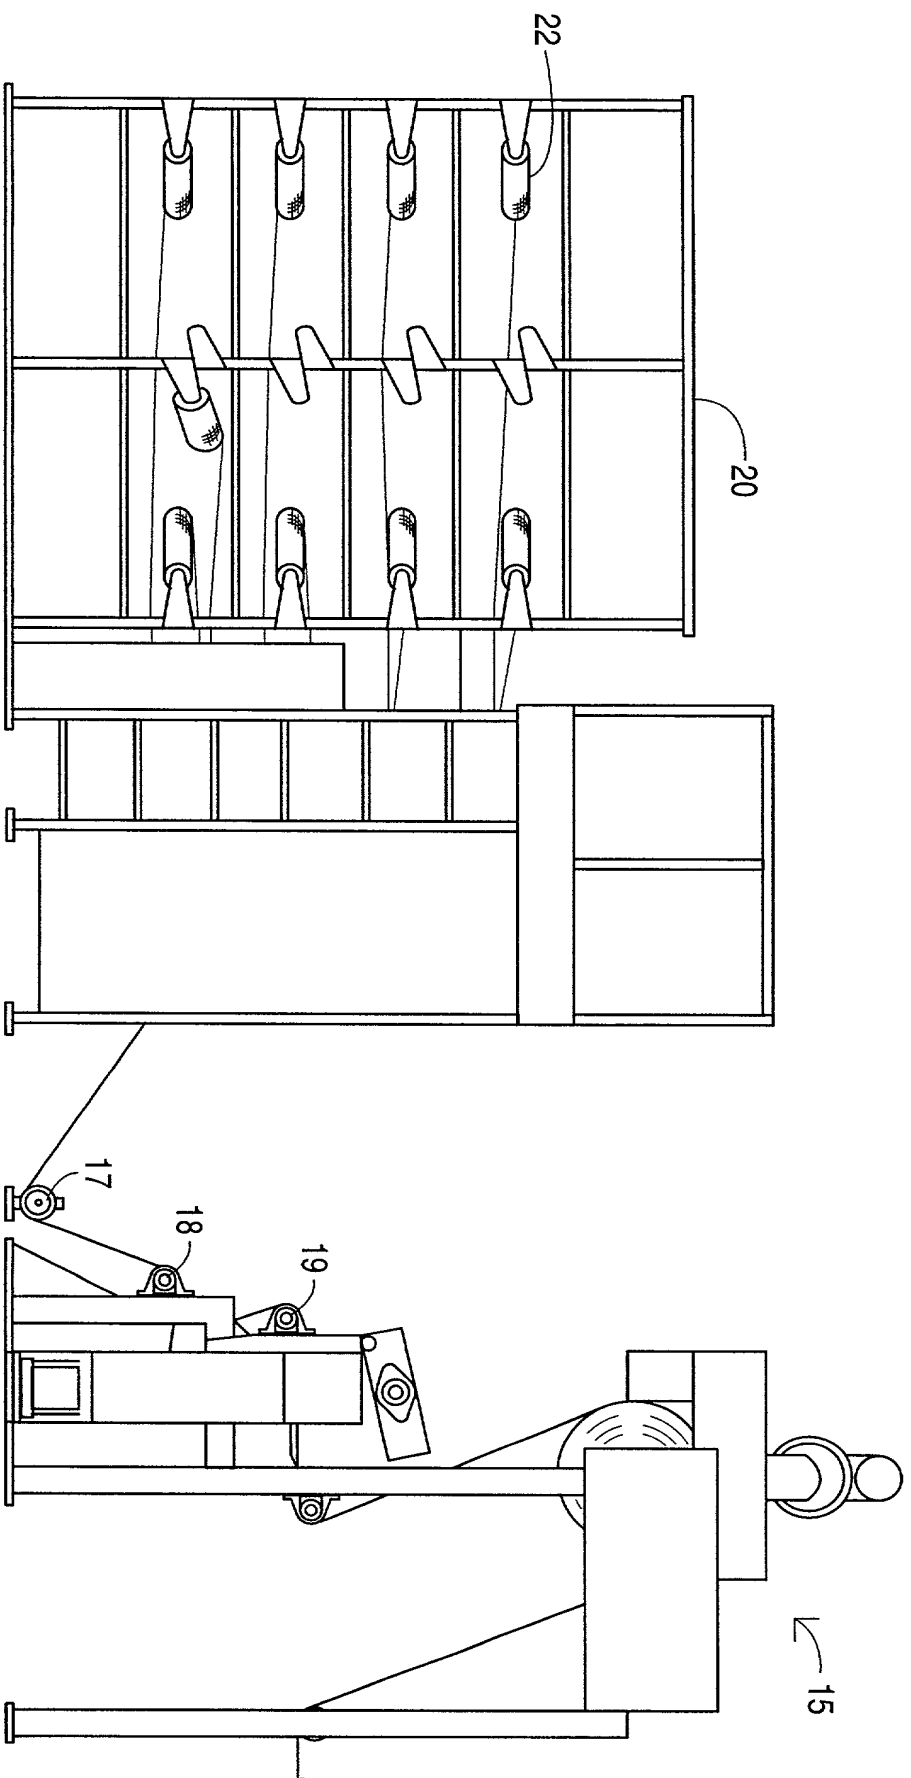


FIG. 2



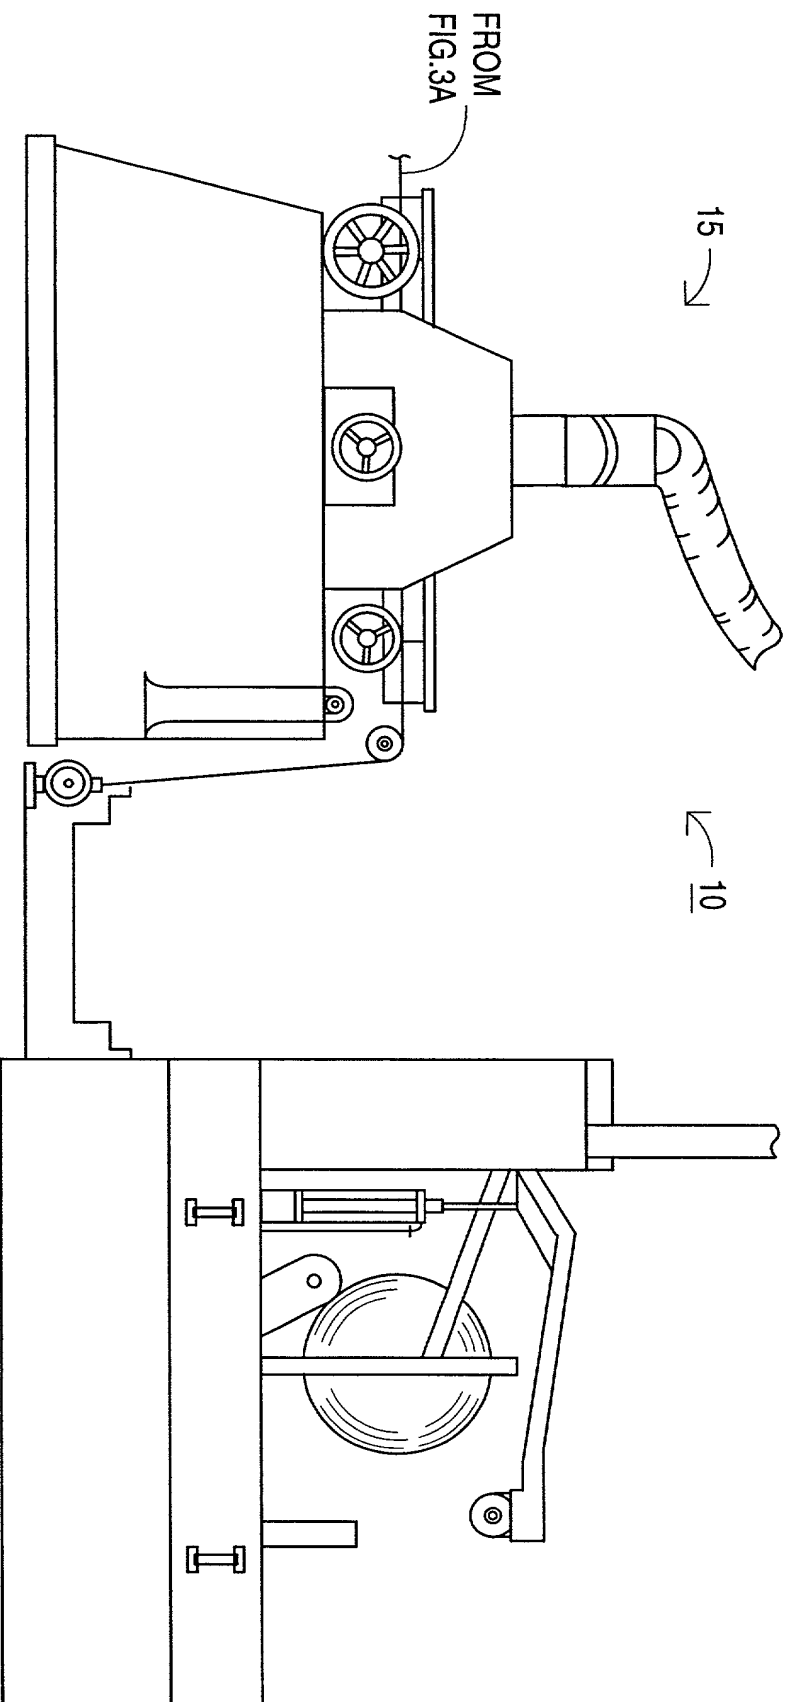


FIG. 3B

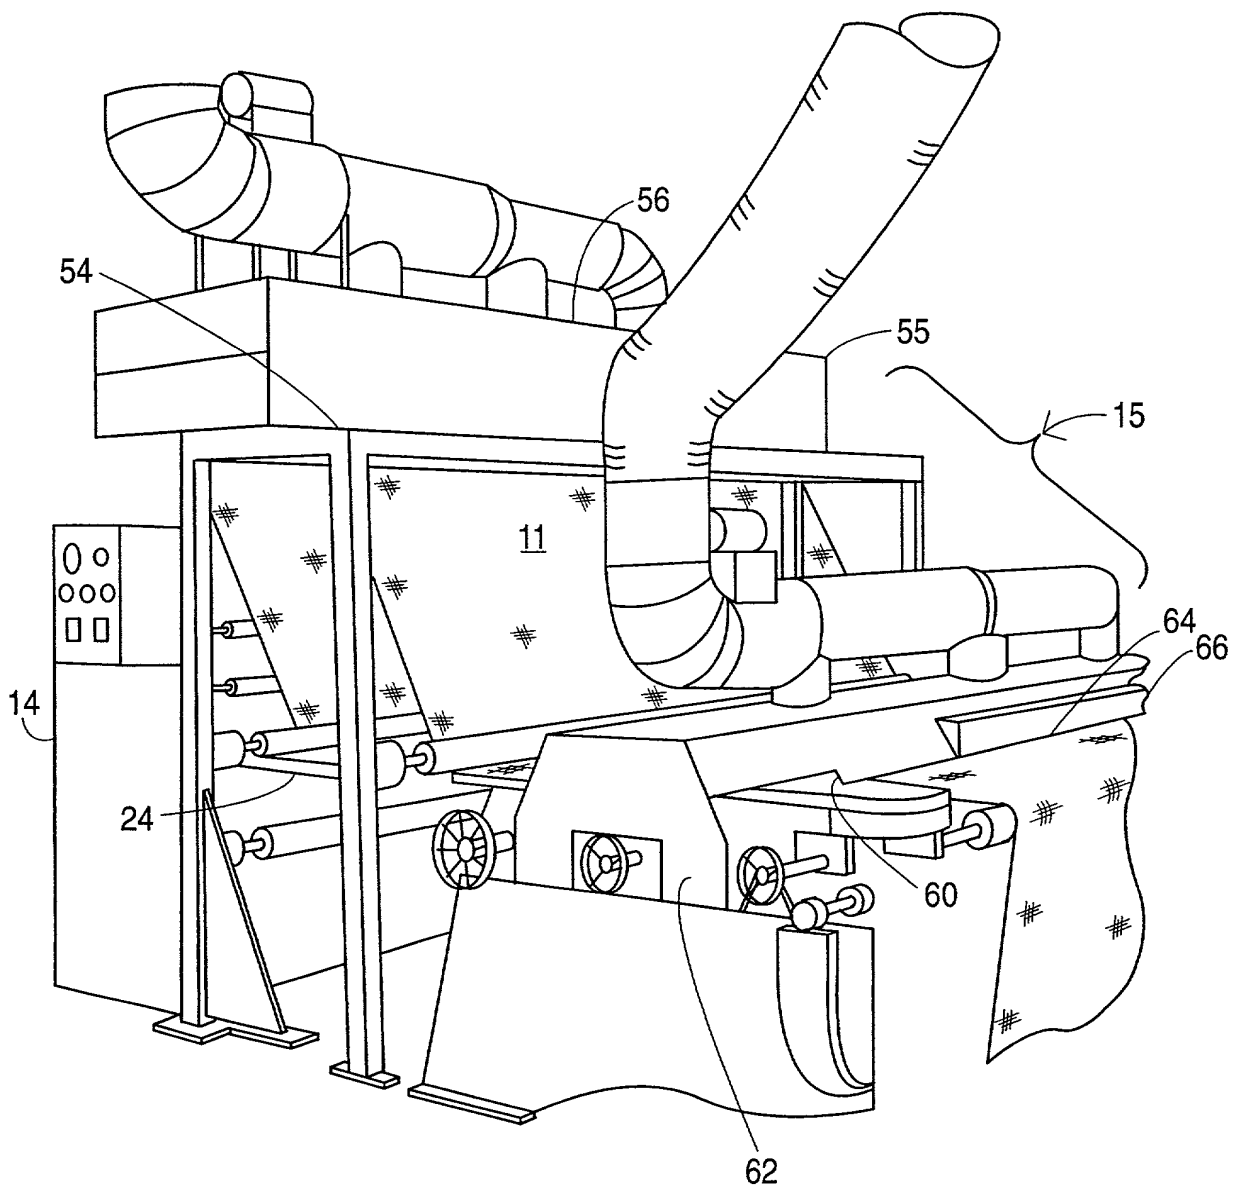


FIG. 4

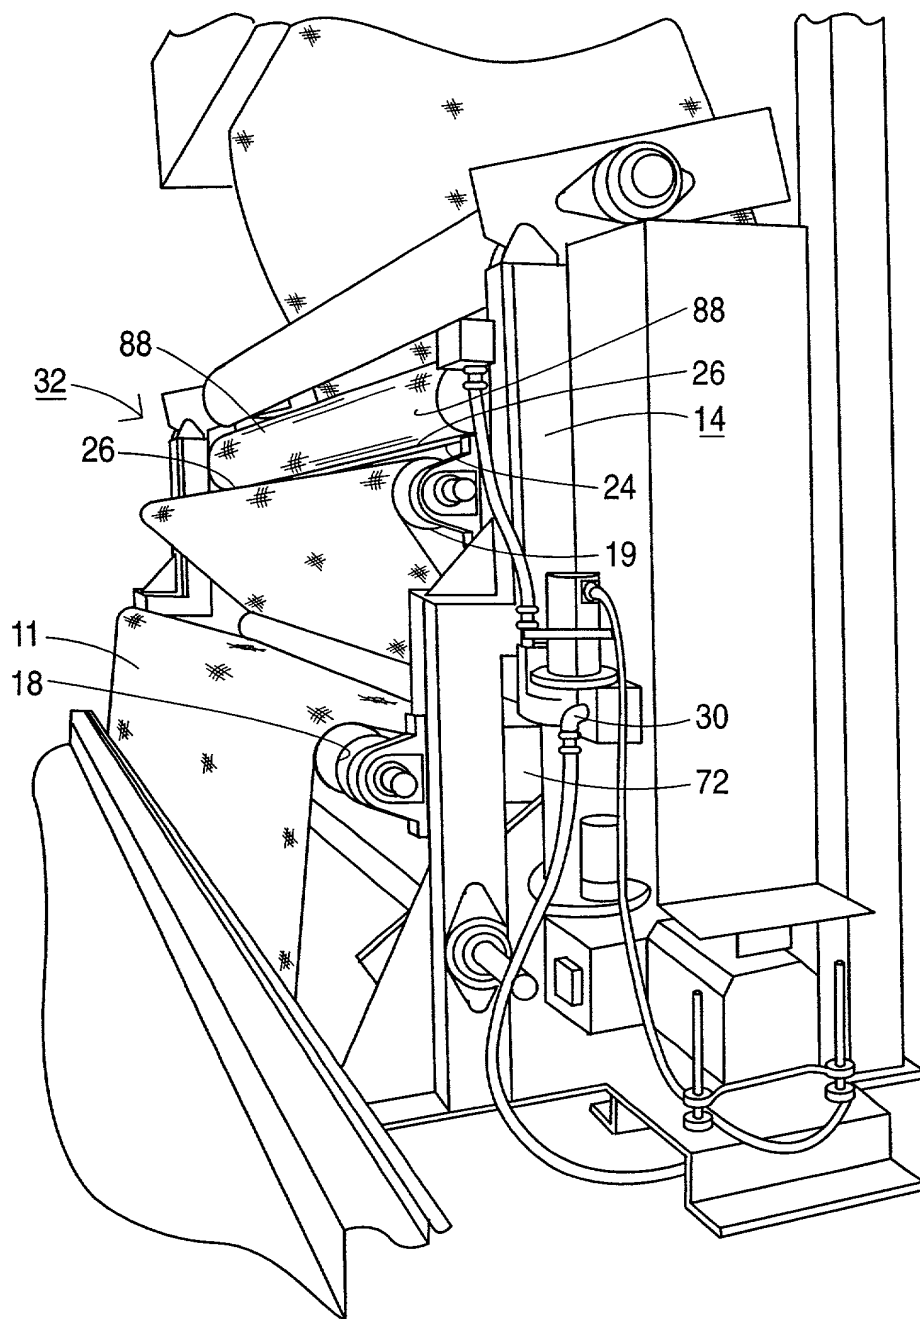


FIG. 5

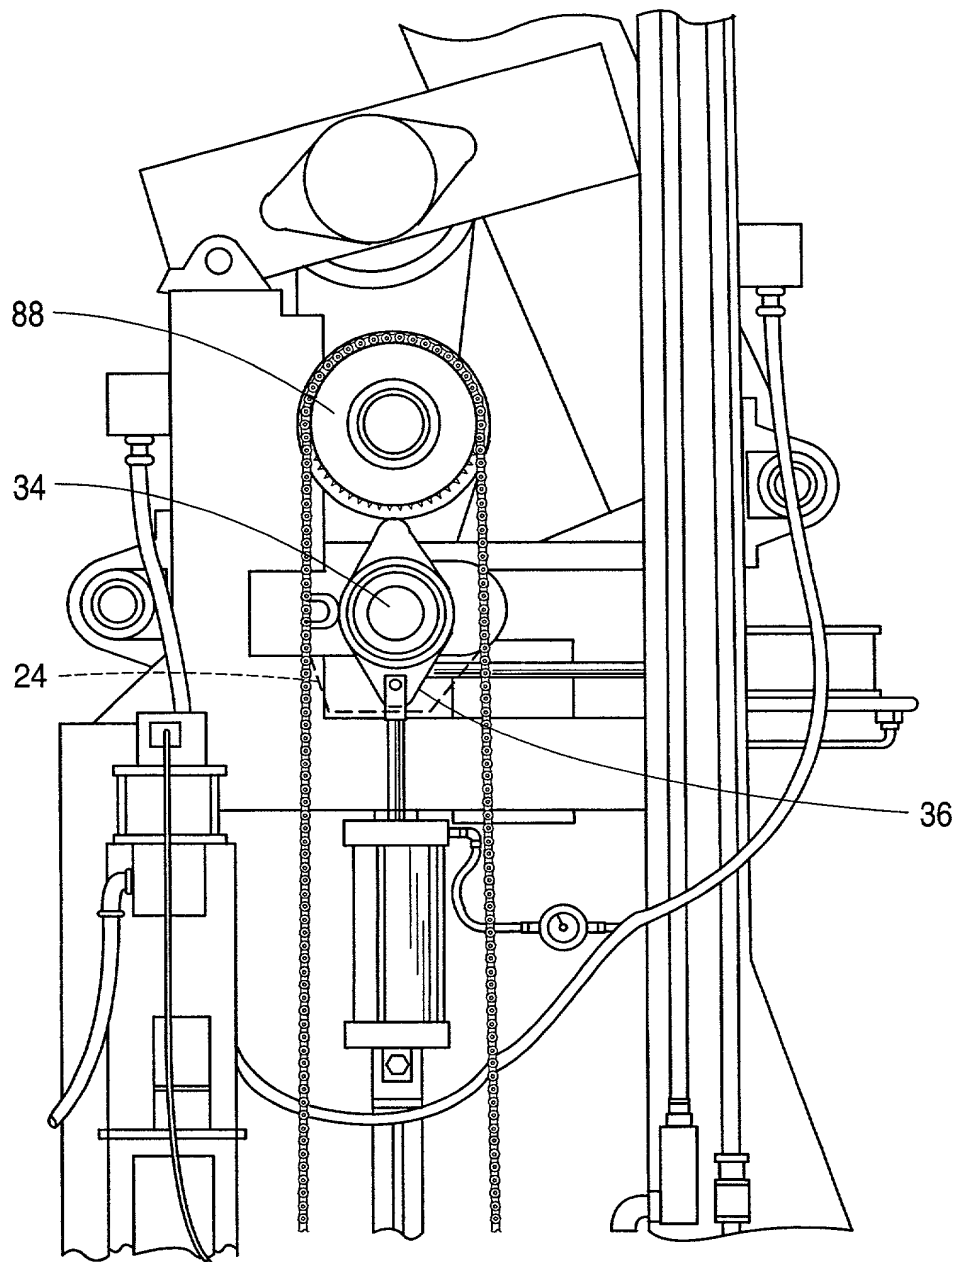


FIG. 6A



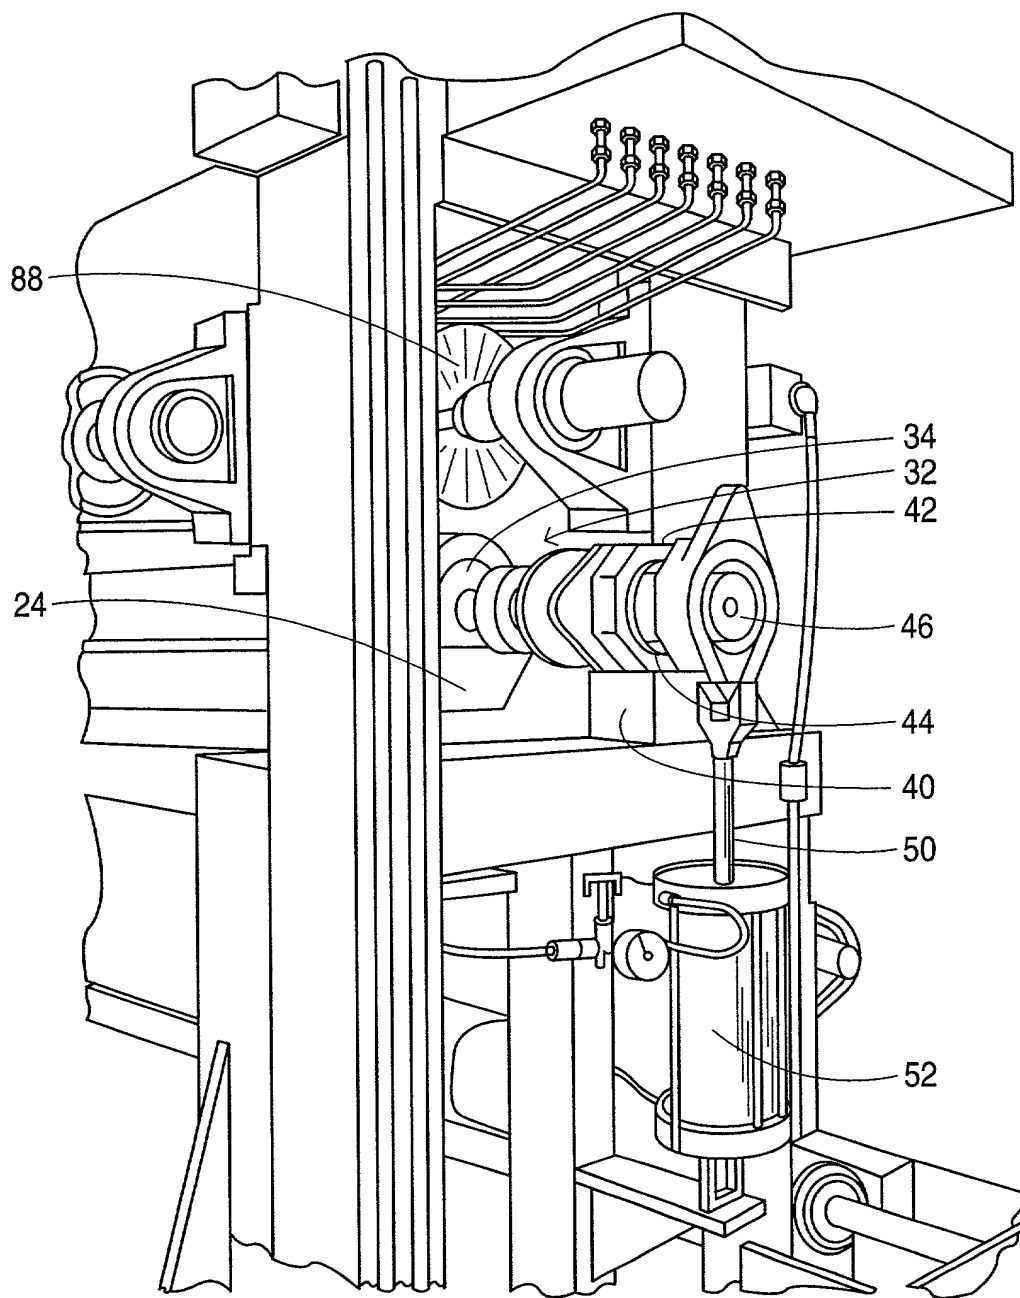


FIG. 6B

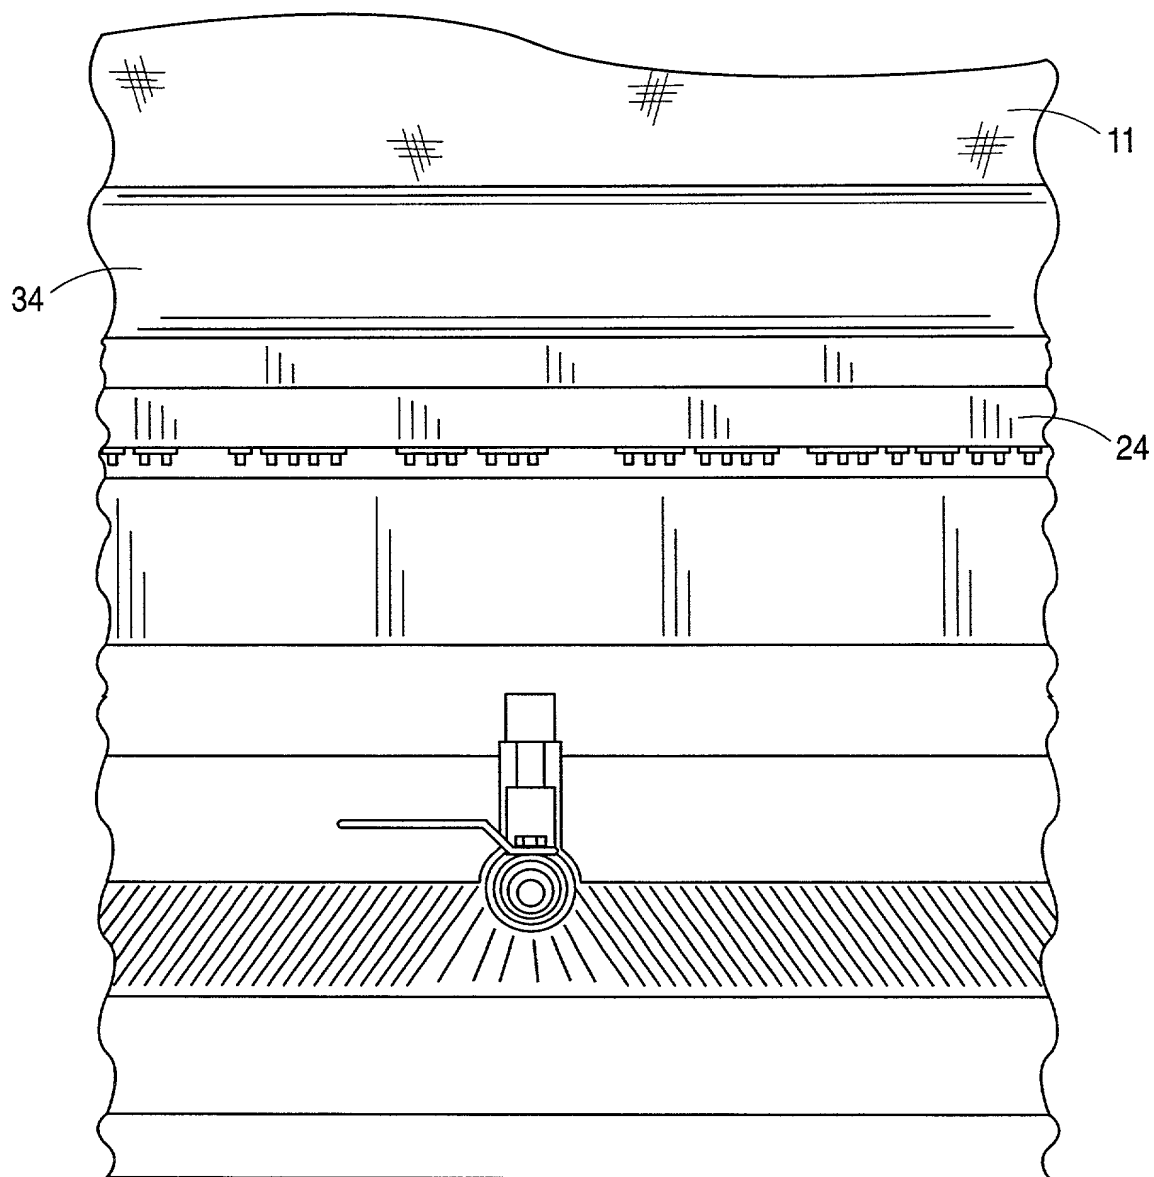


FIG. 6C

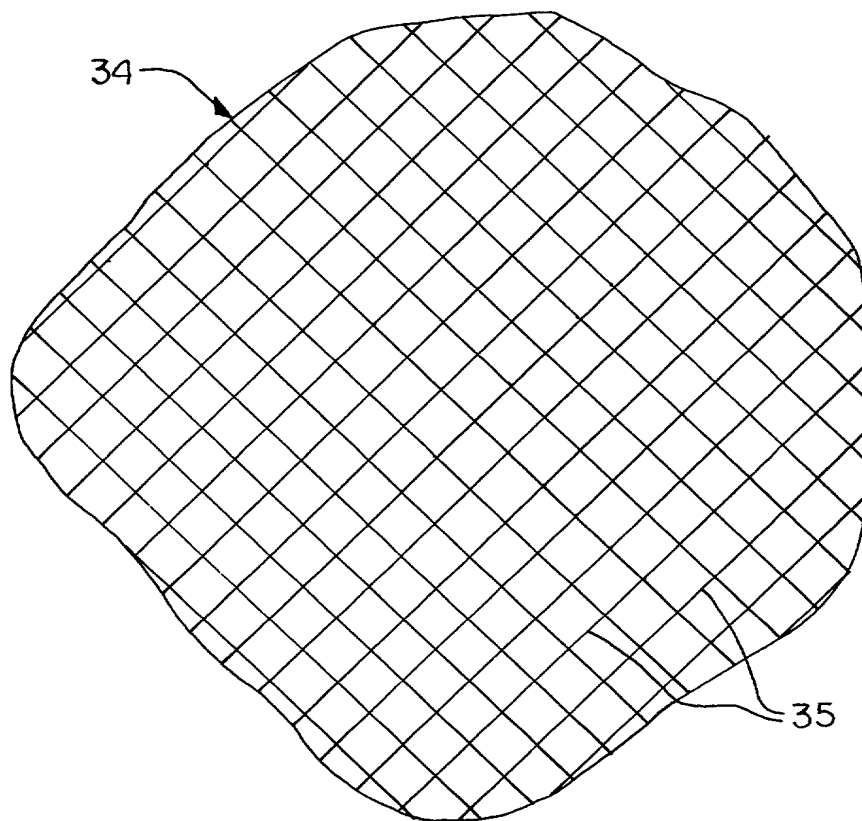


FIG. 7

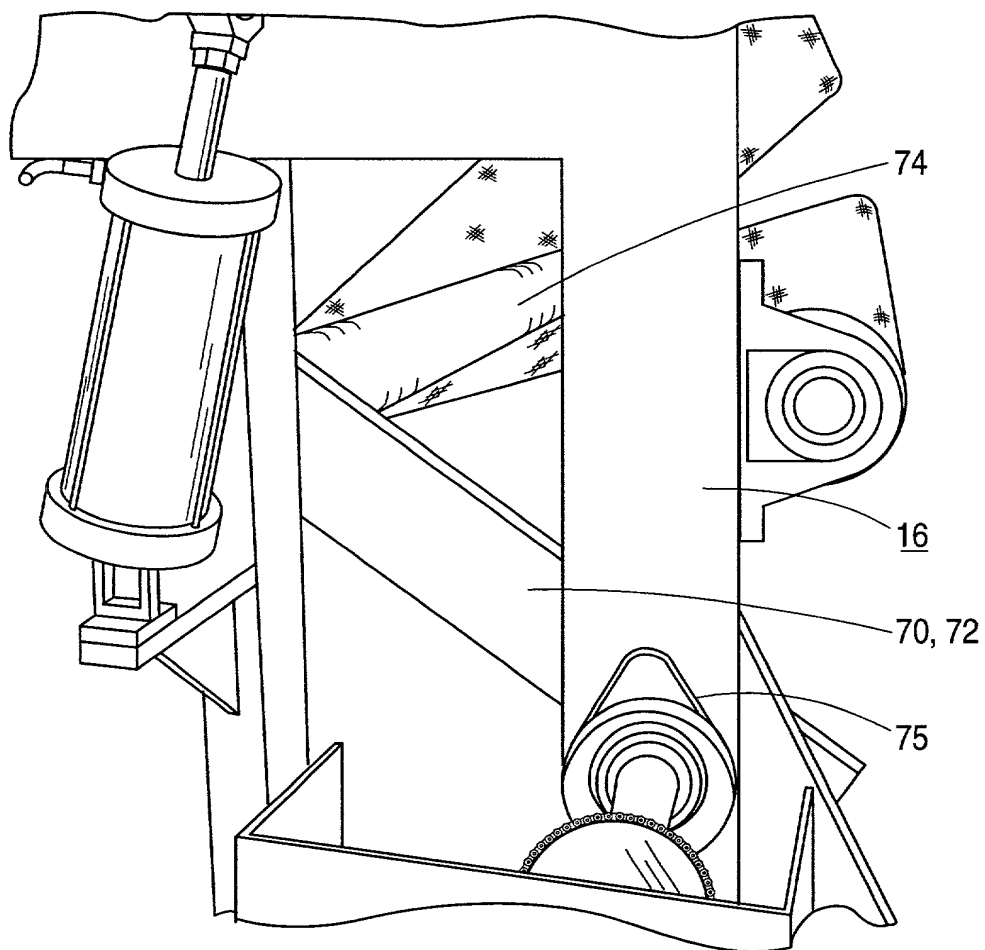


FIG. 8

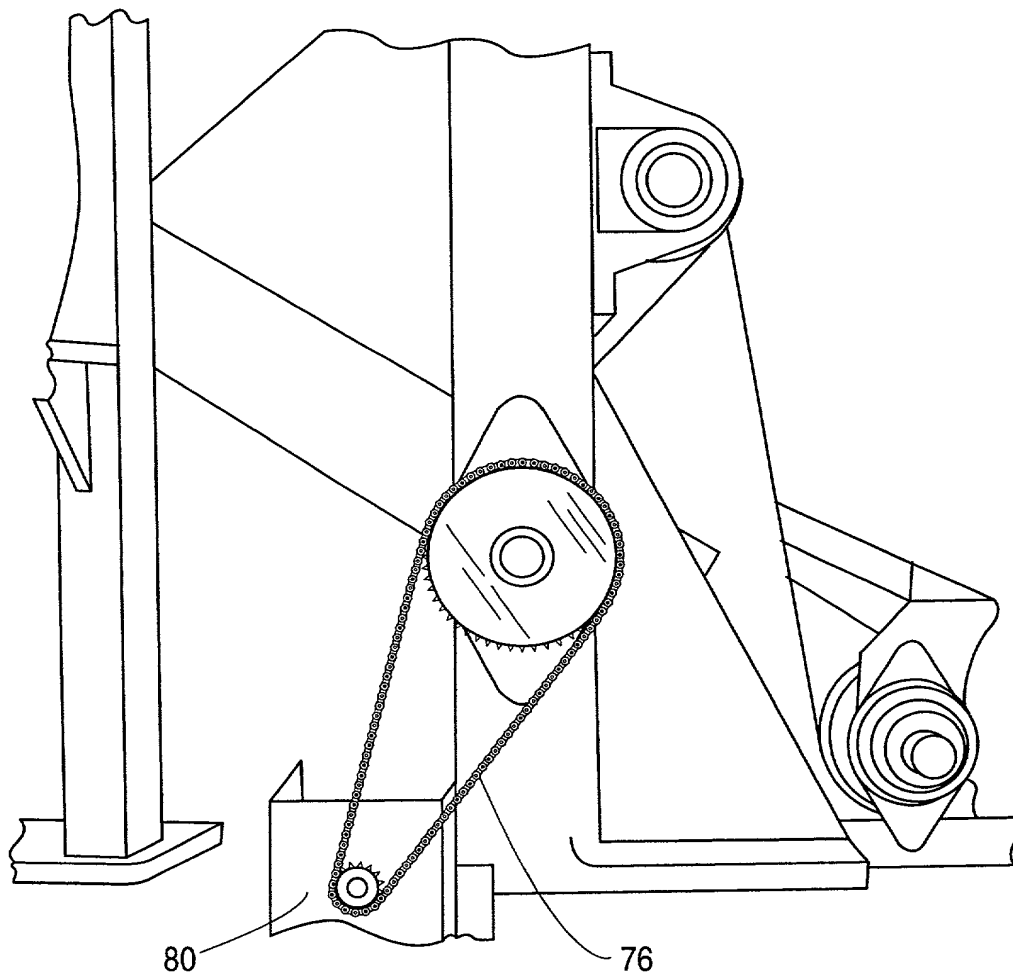


FIG. 9

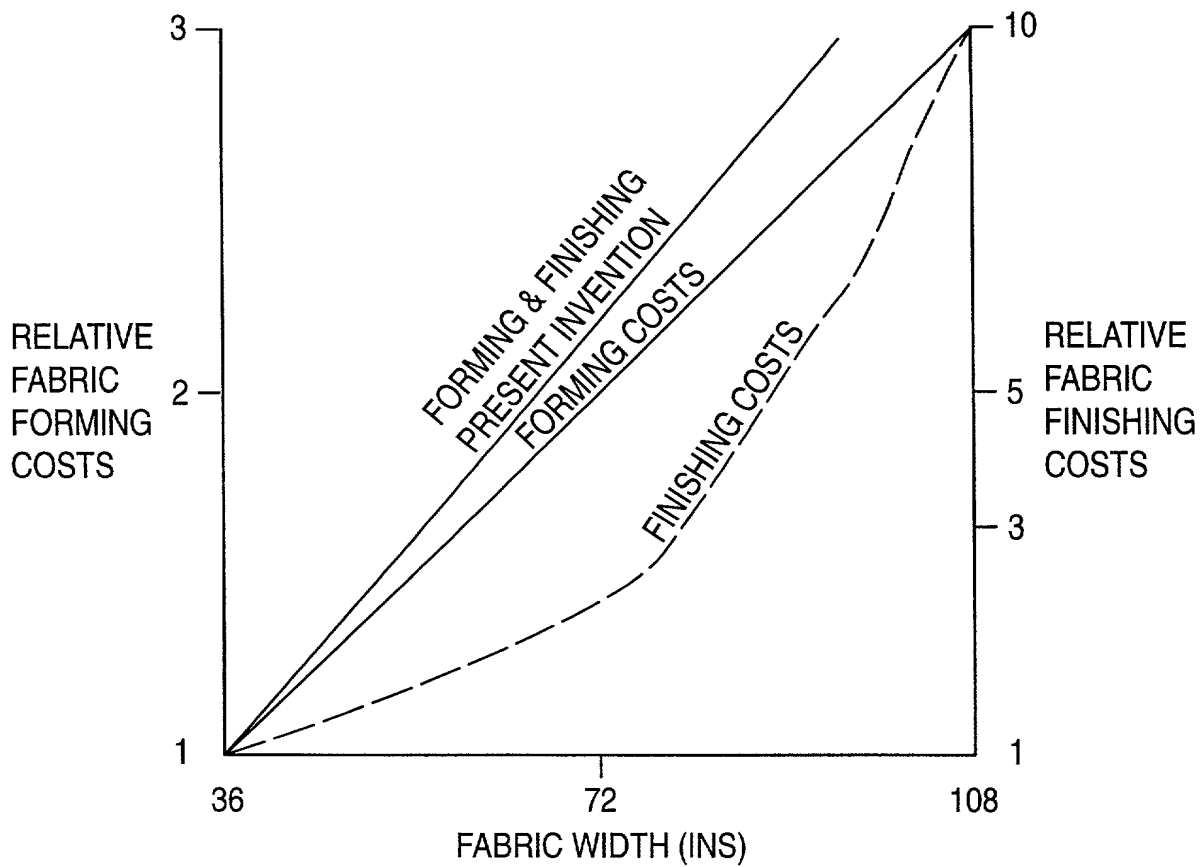


FIG. 10

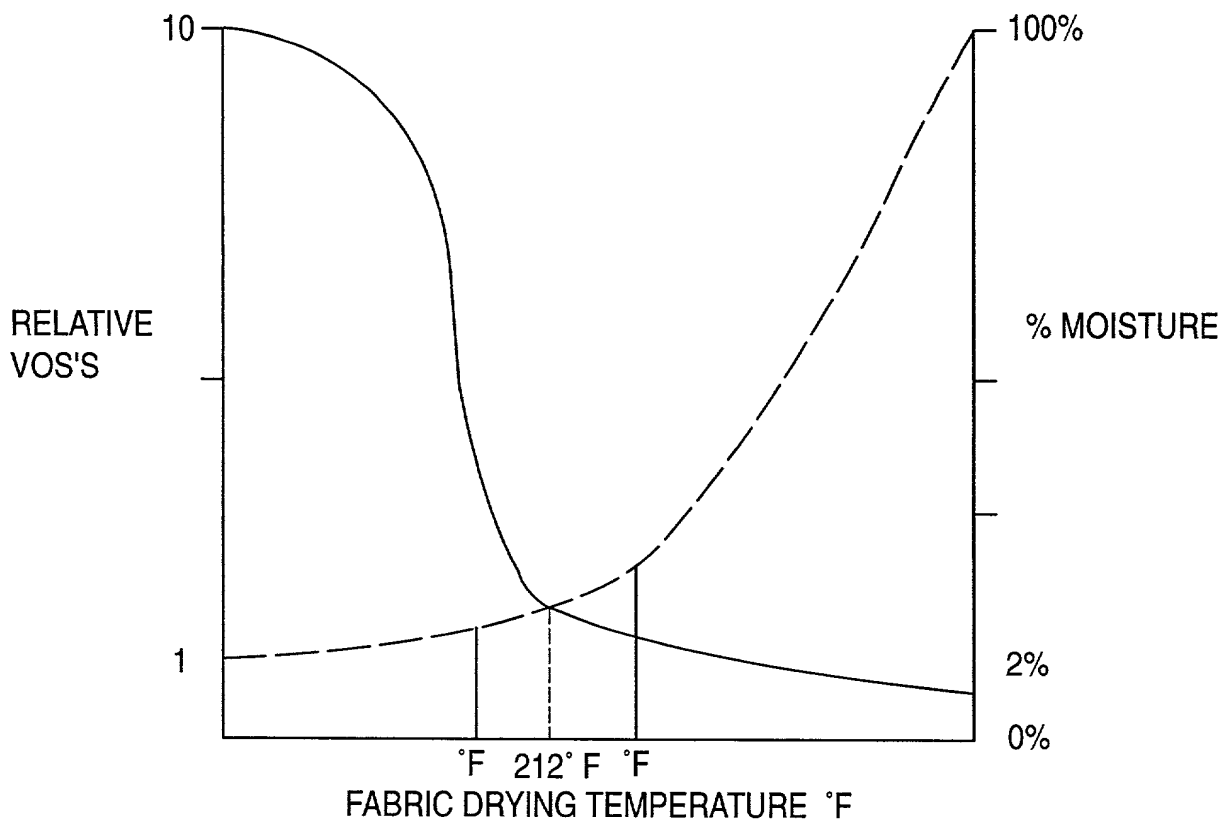


FIG. 11A

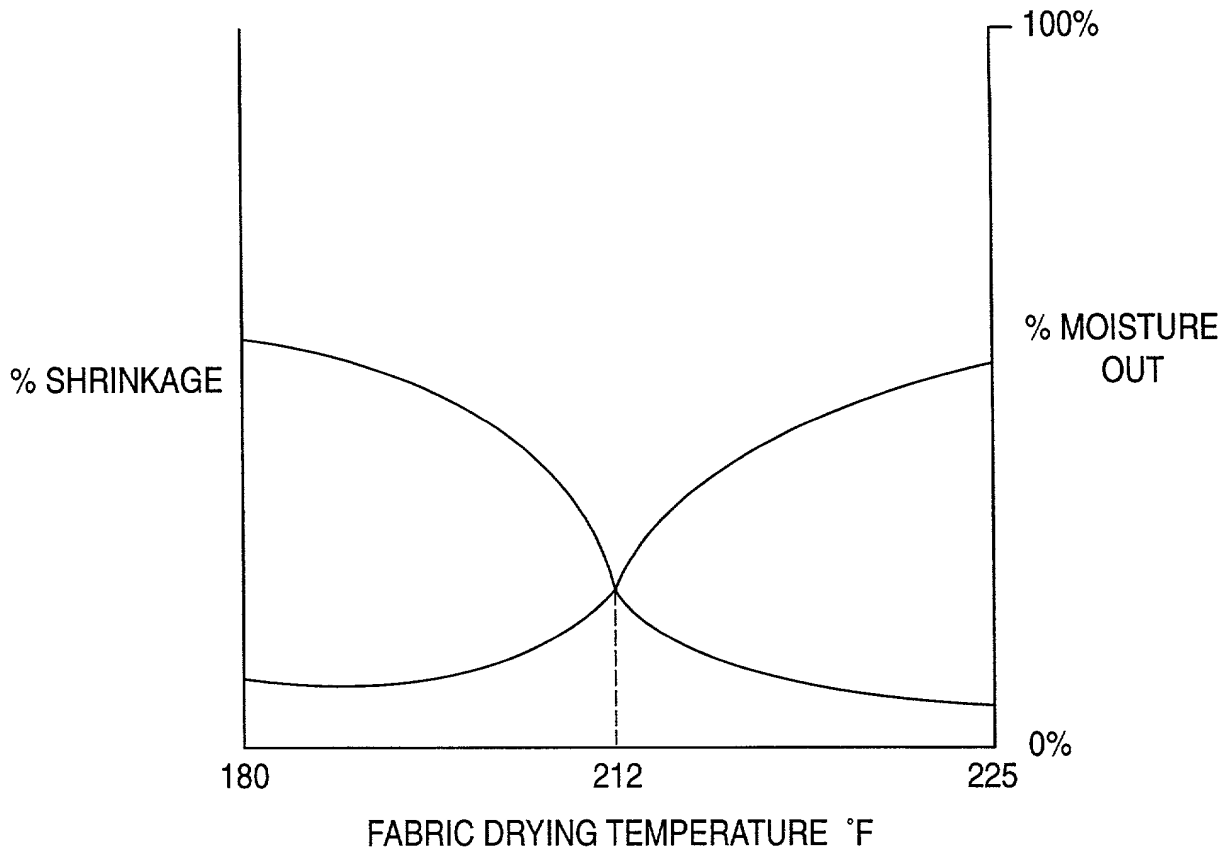


FIG. 11B

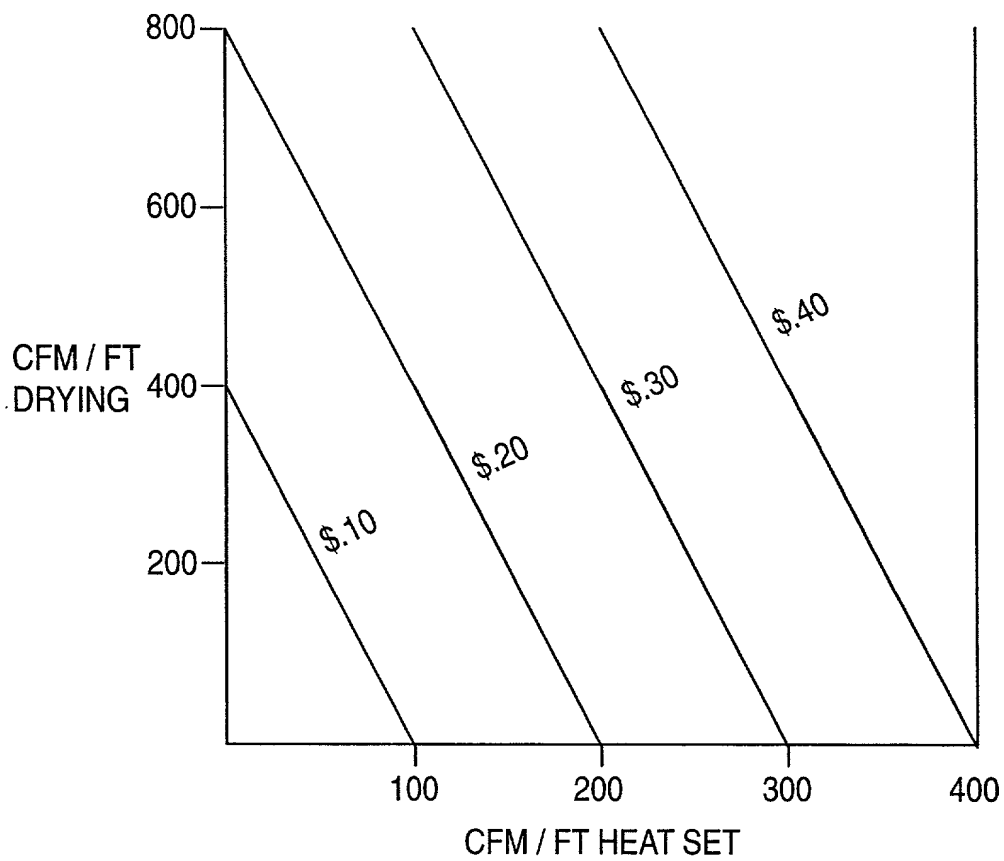


FIG. 12

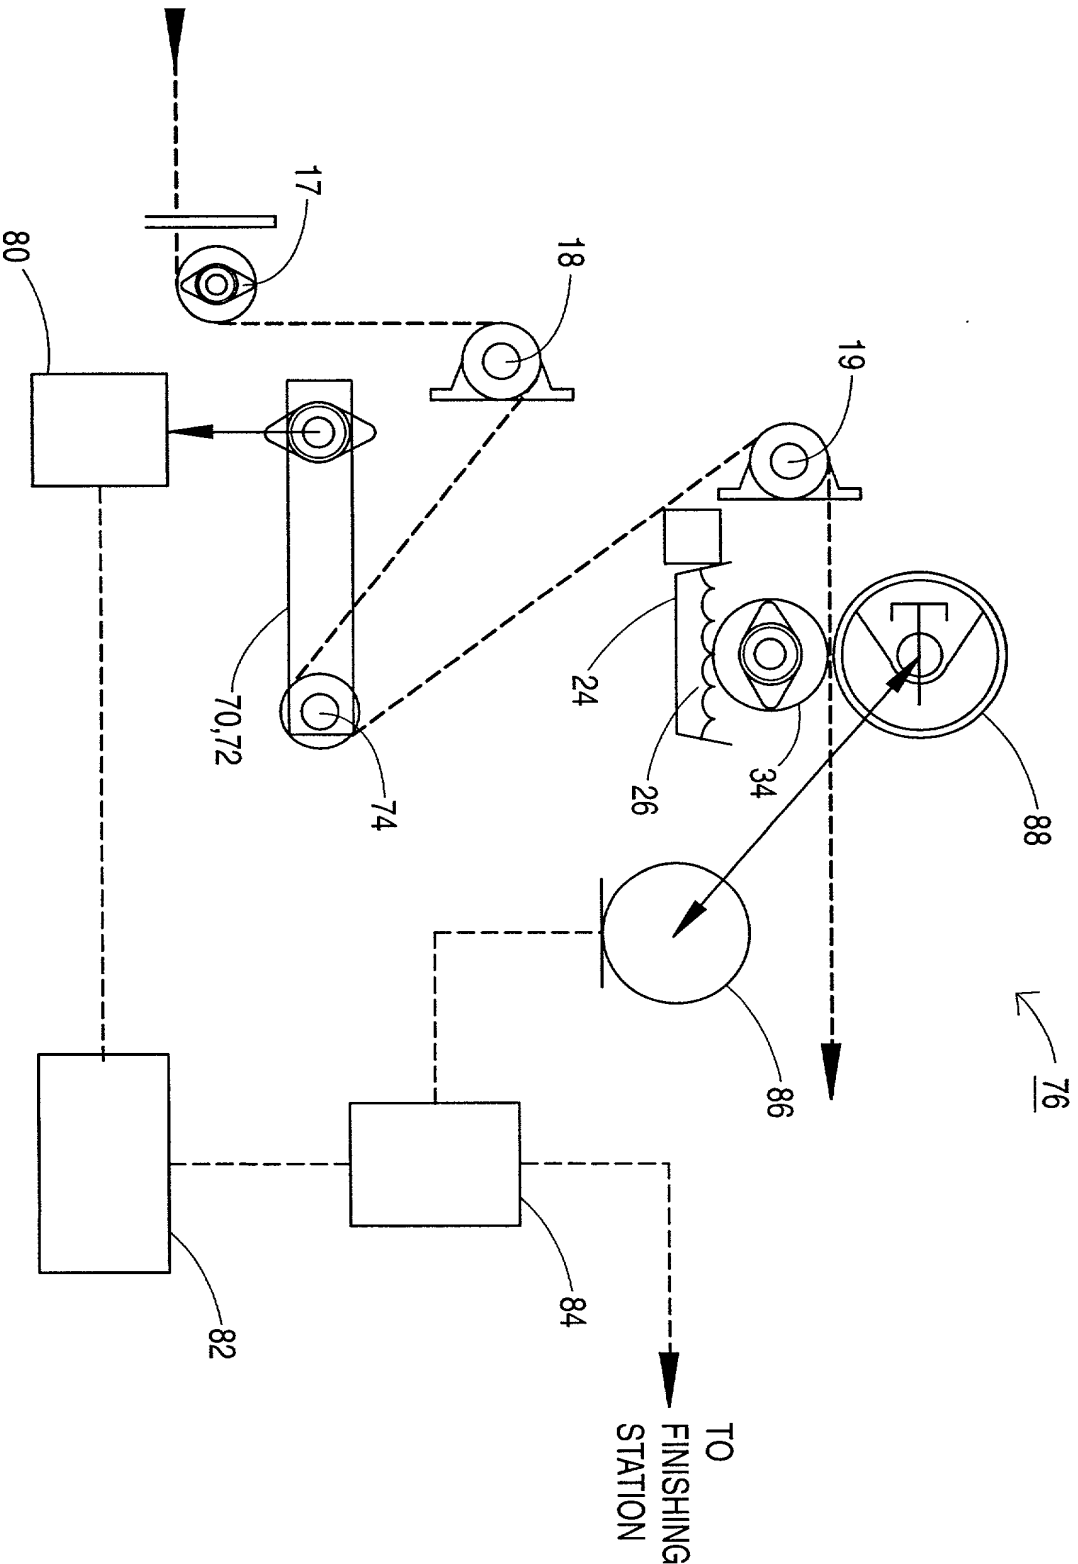


FIG. 13

09616616.071400



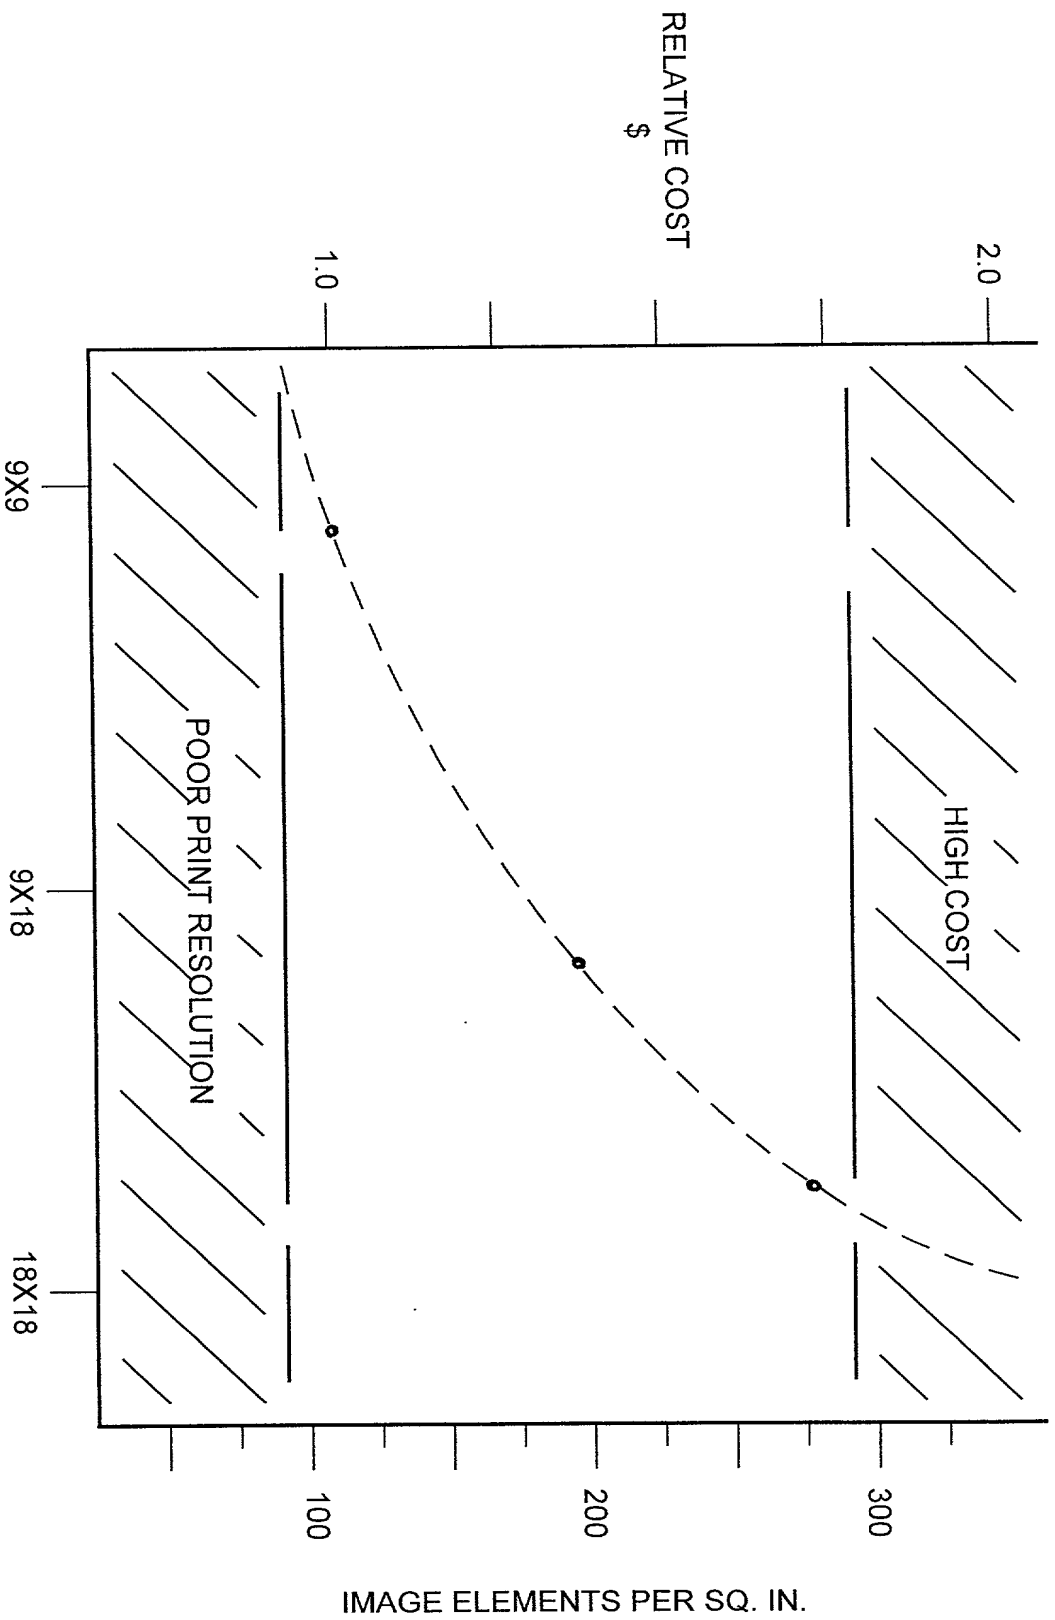


FIG. 14

09616616 071410

**RULE 63 (37 C.F.R. 1.63)**  
**DECLARATION FOR PATENT APPLICATION**  
**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name, and I believe I am the original, first and sole inventor (if only one name listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled WEFT INSERTED, WARP KNIT PRINTING SUBSTRATE the specification of which (check applicable box(es)):

- ☒ is attached hereto.  
☐ was filed on \_\_\_\_\_ as U.S. Application Serial No. \_\_\_\_\_  
☐ was filed as PCT international application No. PCT/\_\_\_\_\_ / \_\_\_\_\_ on \_\_\_\_\_ and (if applicable to U.S. or PCT application) was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 C.F.R. 1.56(a). I hereby claim foreign priority benefits under 35 U.S.C. 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed or, if no priority is claimed, before the filing date of this application:

Prior Foreign Application(s): Application Number	Country	Day/Month/Year Filed
---	---------	----------------------

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application listed below:

Prior Provisional Application(s): Application Serial No.	Day/Month/Year Filed
---	----------------------

I hereby claim the benefit under 35 U.S.C. 120/365 of all prior United States and PCT international applications listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in such prior application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose material information as defined in 37 C.F.R. 1.56(a) which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

Prior U.S./PCT Application(s): Application Serial No.	Date/Month/Year Filed	Status: patented, pending, abandoned
--	-----------------------	---

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1) Inventor's Signature _____ Date _____		
Inventor's Name (typed)	Earl T. Crouch	USA
	First Middle Initial Family Name	Citizenship
Residence (City)	Greensboro	State/Foreign Country) North Carolina
Post Office Address	5500 East Rockingham Road	Zip Code 27407

2) Inventor's Signature _____ Date _____		
Inventor's Name (typed)	Joe nicholson	USA
	First Middle Initial Family Name	Citizenship
Residence (City)	Kernersville	State/Foreign Country) North Carolina
Post Office Address	215 Drummond Street	Zip Code 27284

3) Inventor's Signature _____ Date _____		
Inventor's Name (typed)	_____	_____
	First Middle Initial Family Name	Citizenship
Residence (City)	_____	State/Foreign Country) _____
Post Office Address	_____	Zip Code _____

**FOR ADDITIONAL INVENTORS, check box ☐ and attach sheet with same information and signature and date for each.**  
**Rhodes & Mason (4/98)**